

Single Fault tolerance Method for Protection Data Flow in the MPLS Network

Belal Al-Fuhaidi^{1*}, Hasan A. A. Asaad¹

¹ Department of computer science, Faculty of Computing and information technology, University of Sina and Technology, Sana'a, Republic of Yemen

Abstract: This paper presents efficient methods for rerouting traffic in the Multiprotocol Label Switching (MPLS) network, when a fault occurs in the working link. The proposed methods have been designed to handle single fault based on the protection switching and rerouting techniques. In this paper three algorithms are developed for fault recovery in the MPLS network based on ingress LSR, alert LSR and core LSR. The proposed methods have been simulated using the Network Simulator (NS2) and the simulation results show that the proposed methods significantly improve the network performance in comparison to similar existing methods.

Keywords: MPLS, Working link, Protection switching, Rerouting, Network simulator, TAP path.

1. Introduction

MPLS stands for Multiprotocol Label Switching. It is a famous networking technology belongs to the family of packet switching networks. MPLS had been designed to overcome the limitations of IP based forwarding. It uses labels which are attached to packets to forward them through the network [7- 9]. The MPLS technology improves QoS by defining Label Switching Paths (LSPs) that can meet Specific Service Level Agreements (SLAS) on traffic latency, jitter and packet loss[1, 2]. Several works related to routing traffic problem in MPLS network when a fault occurs in the working link have been reported [3-6]. Some of these works handle single fault [4-6] and others handle single or multiple fault [3]. Haskin's Method [6] provides a fast rerouting protection mechanism by pre-establishing the alternative LSP (FAP, First Alternative LSP) prior to the occurrence of a failure in the PWP (Primary Working Path). When the ingress LSR receives the first packet from the PBP (Primary Backward LSP) it switches traffic to the alternative LSP. The method provide a minimum packet loss but has a maximum packet disordering. Makam's Method [5], the authors have proposed a method that uses a fault indication signal (FIS) to convey the information about the occurrence of a fault on the original LSP. This method enhance the network performance by eliminate packet disordering but has a maximum packet loss. Hundessa's method [4], follows the principle given in [6] and the main objective of the paper is to avoid packet disorder and reduce the average traffic delay. Chandana's method [3], the authors have proposed a method based on the combination of the protection switching technique and rerouting technique, this method can handle single or multiple faults in MPLS network and achieves less recovery time, reduces packet loss and has high throughput.

The proposed method given in this paper can hand single fault that occur in the MPLS network that enhance network performance and has less space complexity in comparison to other methods. The paper is organized as follows: the proposed methods is given in Section 2, Section 3 show the simulation and results, and Section 4 includes the conclusions and feature works.

2. Proposed Method

Copyright © 2018 Belal Al-Fuhaidi *et al.*

doi: 10.18063/wct.v2i2.462

This is an open-access article distributed under the terms of the Creative Commons Attribution Unported License

(<http://creativecommons.org/licenses/by-nc/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited

The proposed method is based on protection switching and rerouting approaches which the existing techniques are used for fault recovery in the MPLS network. On the Ingress LSR, protection switching is used to pre-establish the first alternative path (FAP) in advanced to carry the traffic when a fault occurs in PWP, and rerouting approach is only used to establish the second alternative path (SAP) on demand, that is when a fault occurs on FAP. On the Alert LSR (ALSR), rerouting approach is only used to establish a temporary alternative path (TAP) on demand that is when a fault occurs in PWP. Figures 1, 2 and 3 show the proposed algorithms on the Ingress LSR, Alert LSR and core LSR respectively.

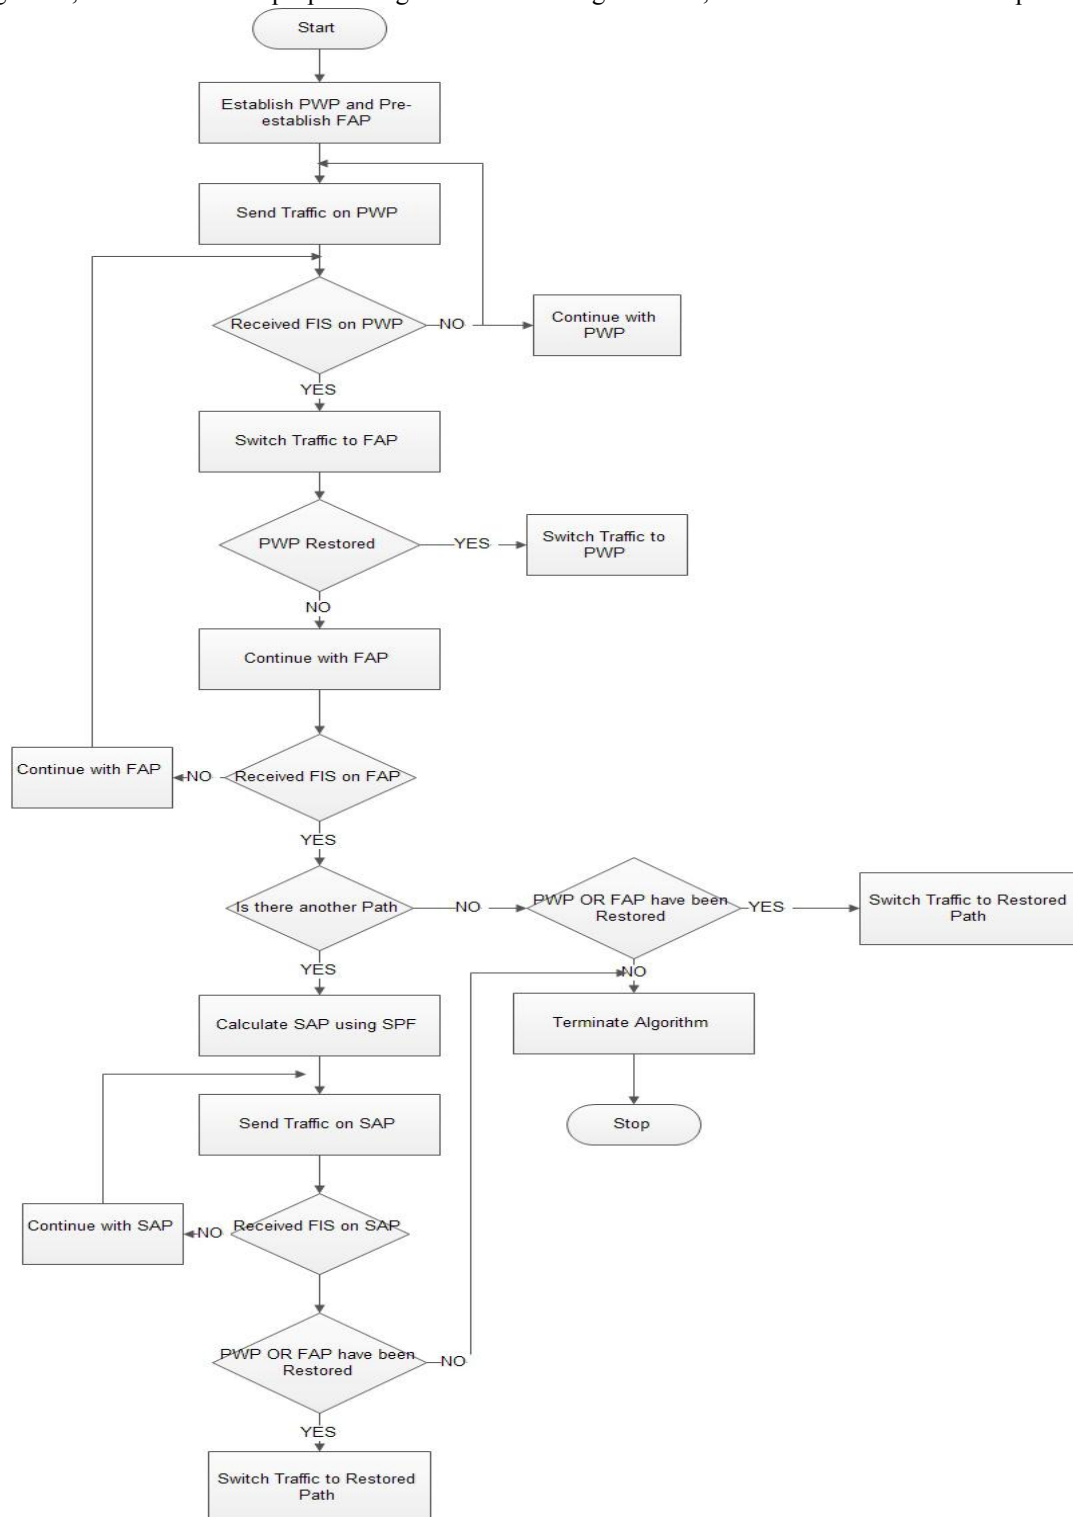


Figure 1. Flow Chart for proposed algorithm on the Ingress LSR

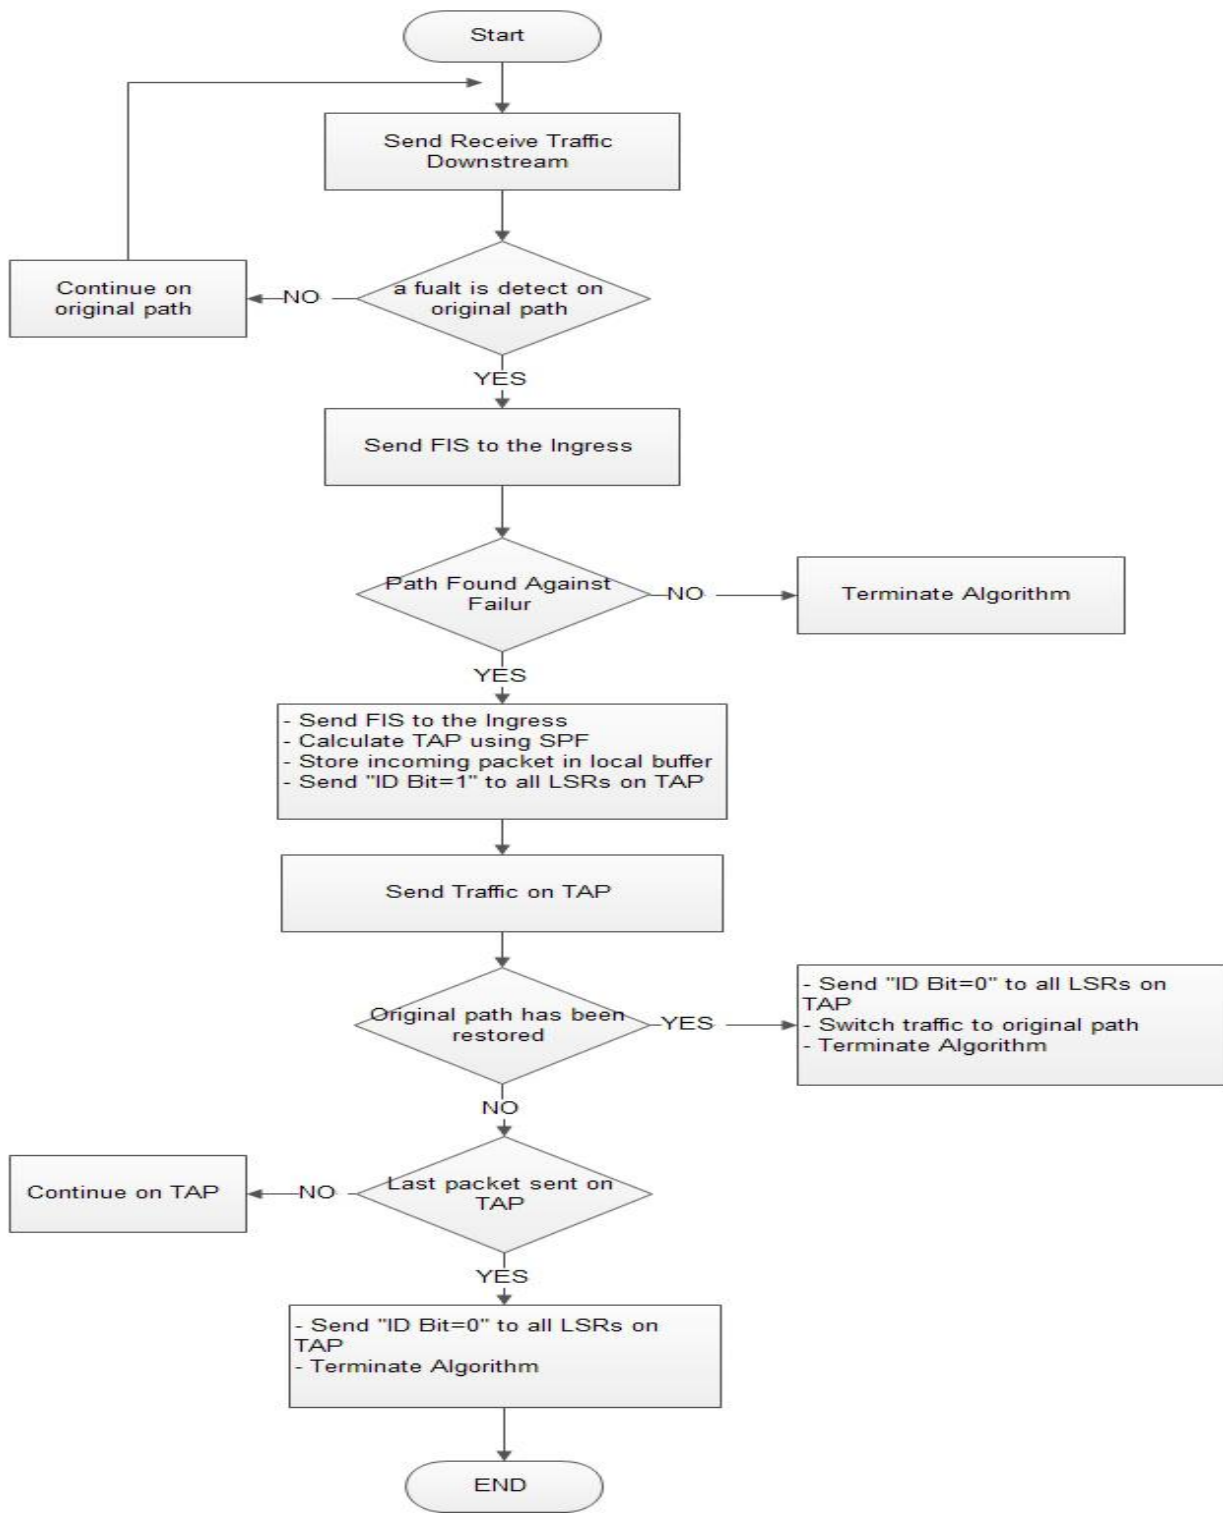


Figure 2. Flow Chart for proposed algorithm on the ALSR

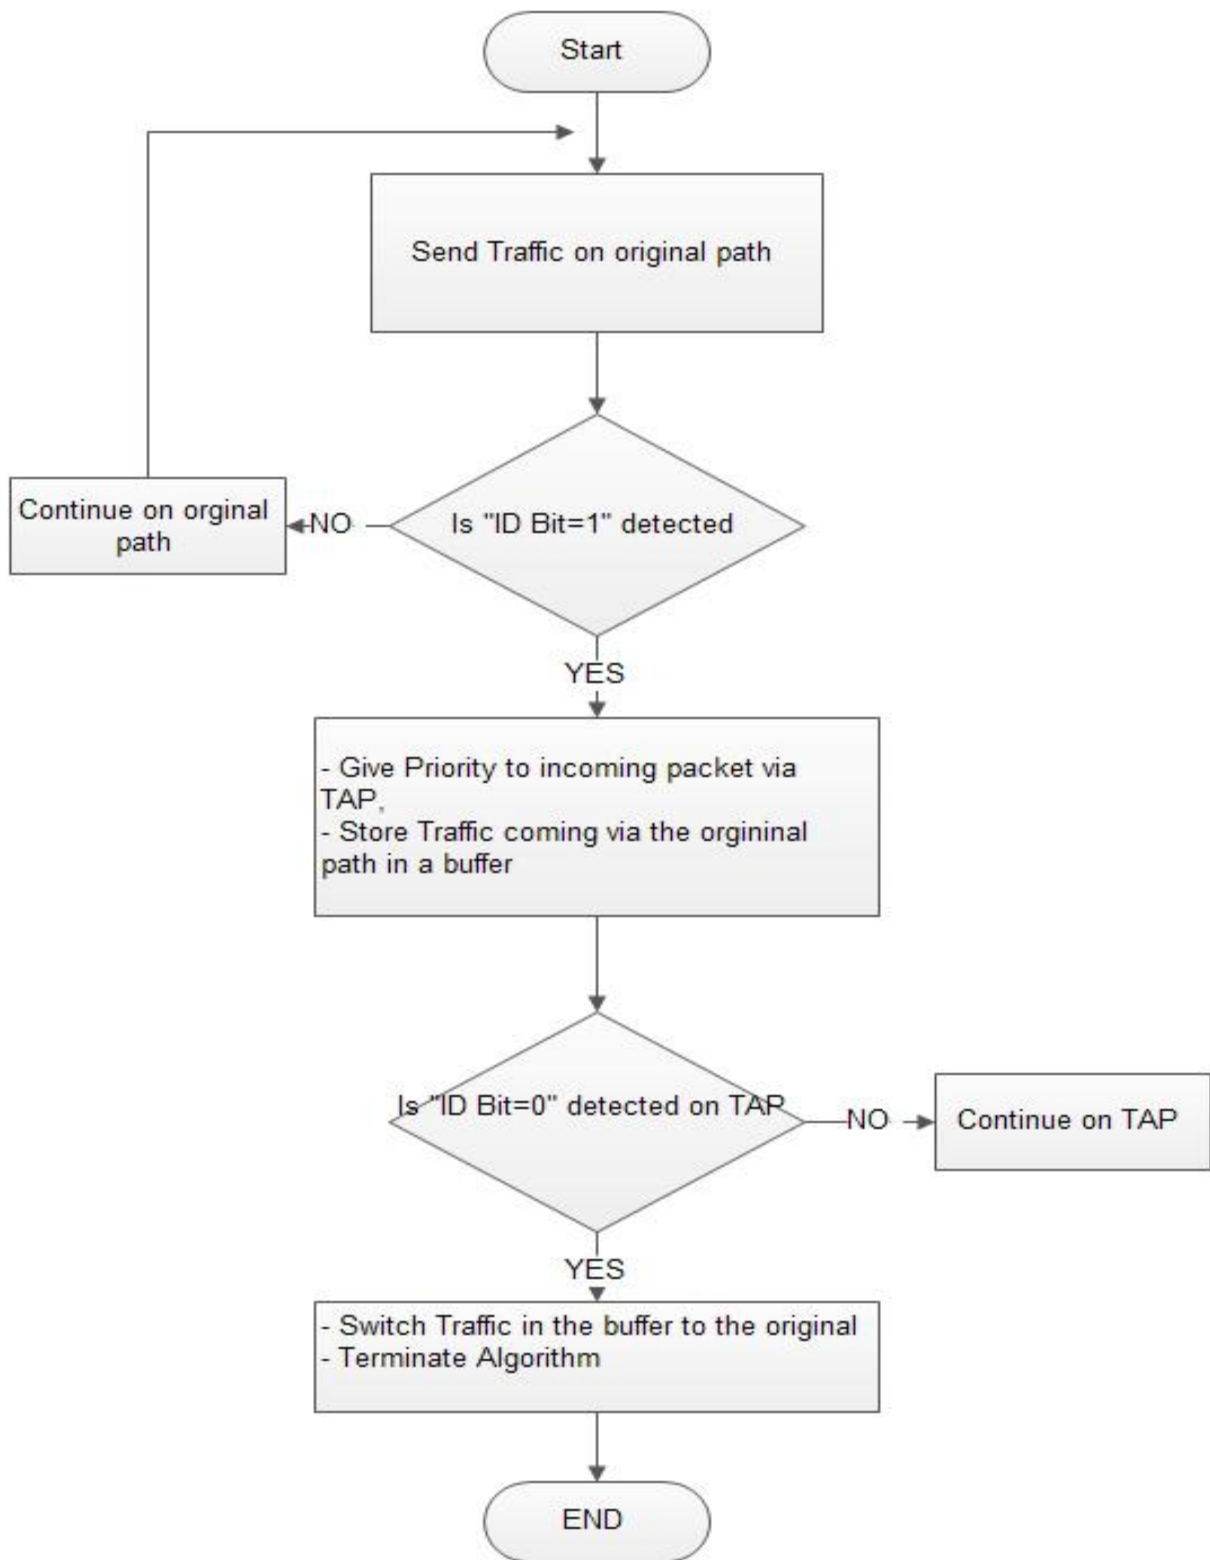


Figure 3. Flow Chart for proposed algorithm on the core LSR

3. Simulation and Results

In this section we will evaluate the results of the implementation of our proposed method for protection of data flow in MPLS network. The simulations are performed on Network Simulator (NS2) [10-12]. All links were set up as duplex with 10ms delay and using DropTail Queuing, which serves packets on First Come First Service (FCFS) basis. Also, the link have a bandwidth of 2Mbps and the types of the transmitted data in the network are multimedia. The

simulation parameters used in three runs as shown in Table (1), and the simulated scenario is as shown in **Figure 4**.

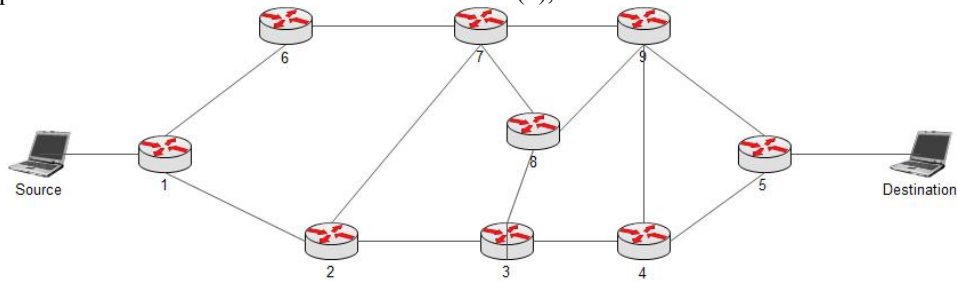


Figure 4. The network topology used in the simulation process

| Parameter | Run 1 | Run 2 | Run 3 |
|-----------------|-----------|-----------|-----------|
| Simulator | Ns-2.34 | Ns-2.34 | Ns-2.34 |
| Simulation Time | 60 second | 60 second | 60 second |
| Packet Size | 128 Bytes | 256 Bytes | 512 Bytes |
| Traffic Type | CBR (UDP) | CBR (UDP) | CBR (UDP) |

Table 1. Simulation Parameters used in various Runs with Data Rate=400kbps and 1 Mbps

It is assumed that a fault occurs in PWP after 12 second. Figures 5, 7, 9 and 11 illustrate the results based on 400kbps data rate while figures 6,8,10 and 12 illustrate the results based on 1Mbps data rate.

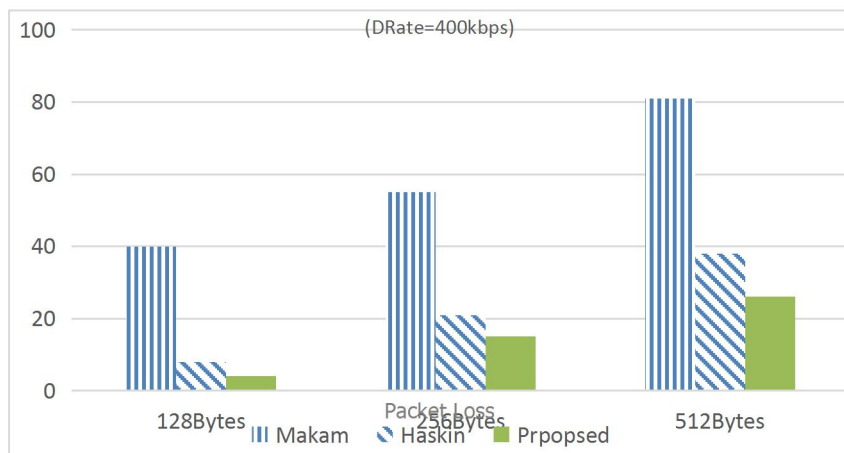


Figure 5. Packet loss versus packet size

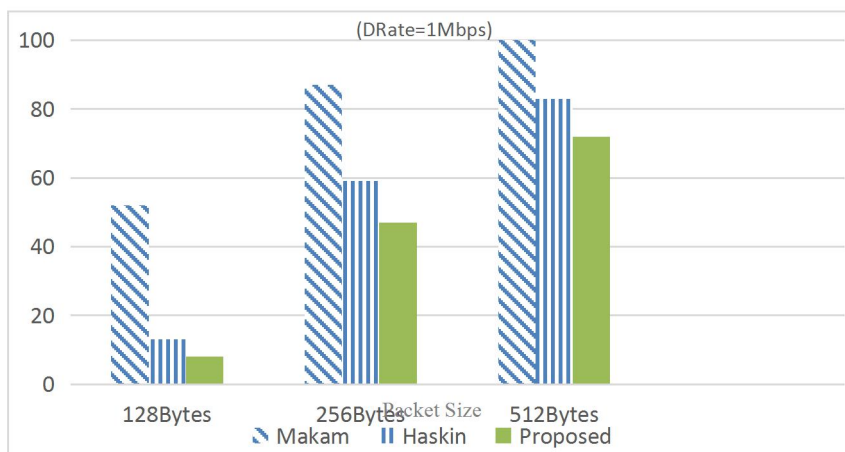


Figure 6. Packet loss versus packet size

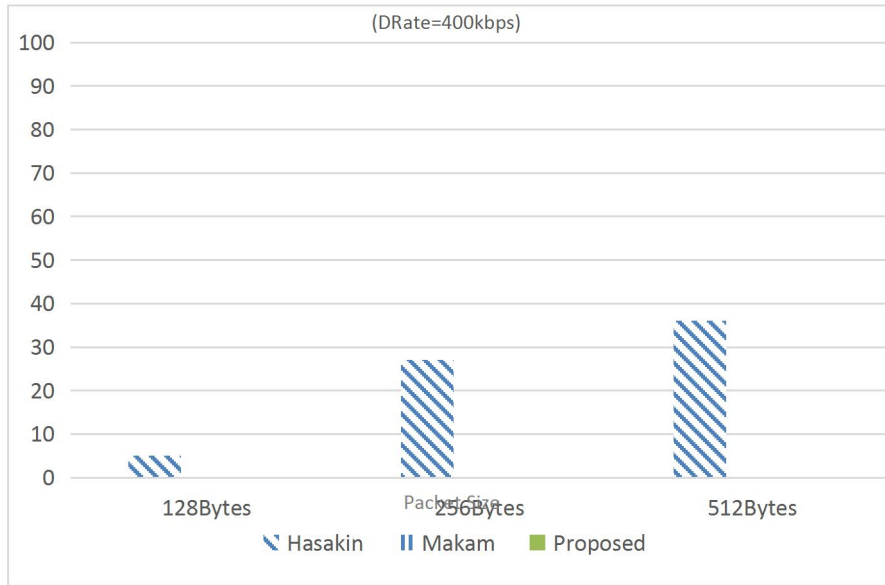


Figure 7. Packet disorder versus packet size

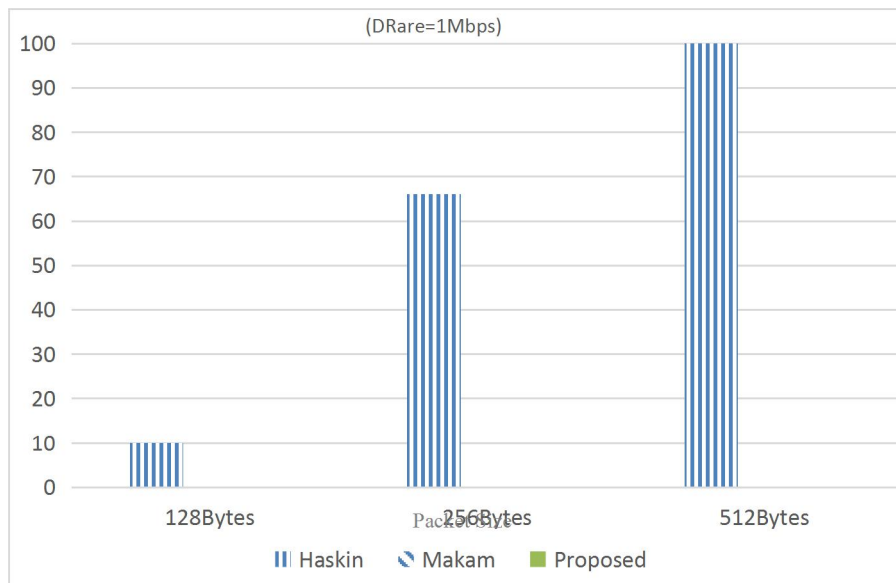


Figure 8. Packet disorder versus packet size

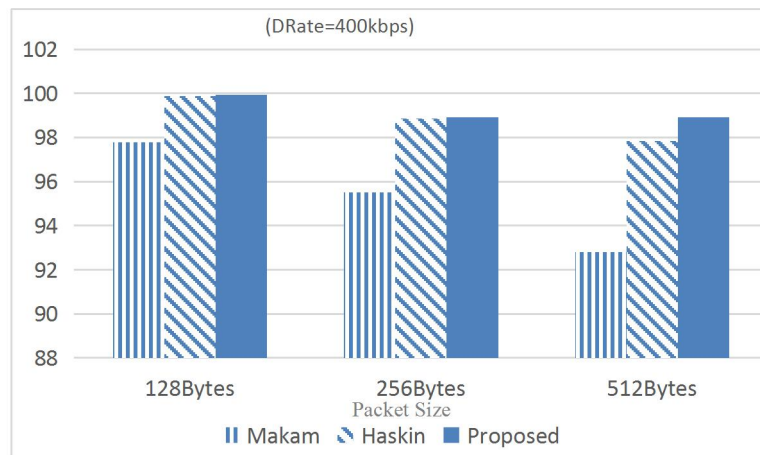


Figure 9. Packet delivery ratio versus packet size

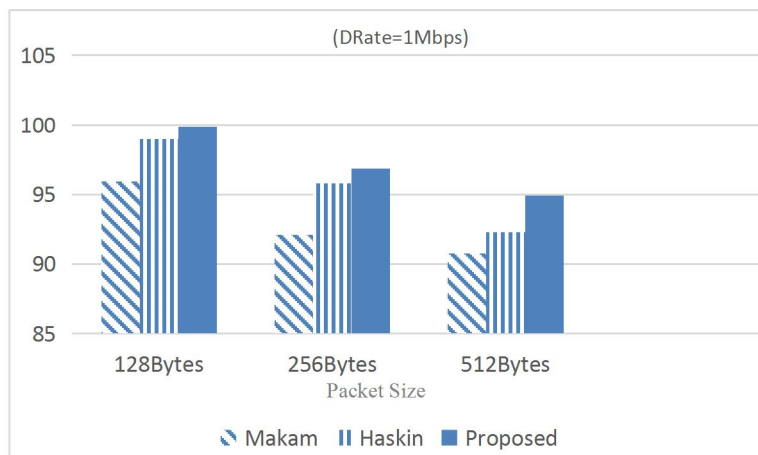


Figure 10. Packet delivery ratio versus packet size

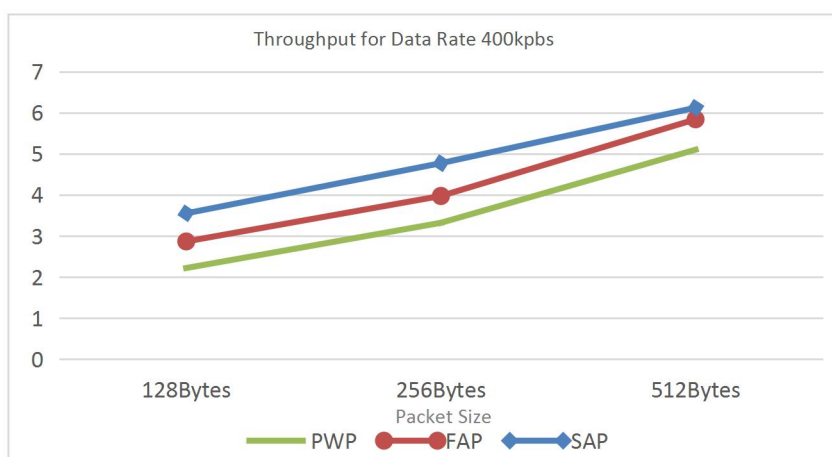


Figure 11. Throughput versus packet size

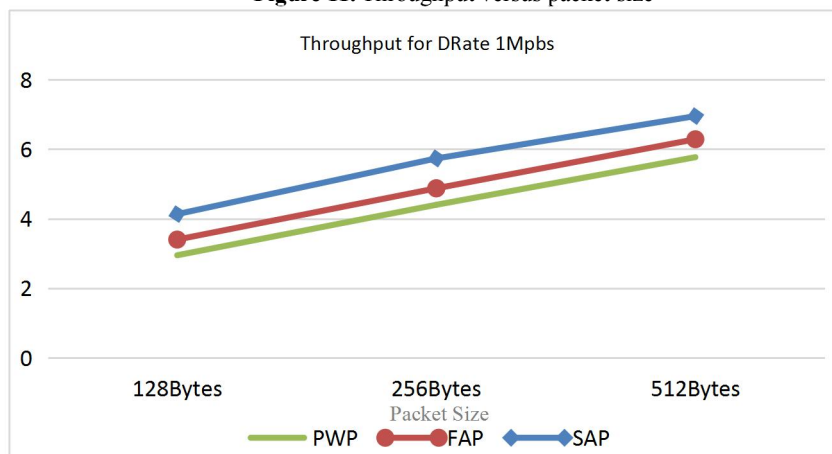


Figure 12. Throughput versus packet size

From the previous Figures 5- 12, a comparative analysis of the performance metrics will be given based on the results shown in the previous figures:

Packet Loss: It is very clear from the results shown in Figures 5 and 6 that the proposed method has less packets loss than Haskin's method and Makam's method under all packet sizes. Makam's method introduces more packets loss than Haskin's method.

Packet Disorder: It is clear from the results shown in Figures 7 and 8 that the proposed method avoids packets disordering as the case with Makam's method. While in Haskin's method, packets arriving from the reverse direction are mixed with the entering packets (incoming packets to the Ingress LSR) which results in packet disordering through

the alternative LSP (FAP) during the restoration period. Also, in Haskin's method, packet disorder increases in proportion to the distance between the Ingress LSR and the alert LSR.

Packet Delivery Ratio: the packet delivery ratio is an important performance metric to ensure the arrival of received packets. **Figure 9** and 10 show that the PDR of the proposed method is better than the PDR of Makam's method and the PDR of Haskin's method. In other words, the proposed method gives more PDR than Makam's method and Haskin's method.

Throughput: Based on the results given in **Figure 11** and 12 one can see that the proposed method gives better throughput than Makam's method and Haskin's method. This is because increase in packets loss gives reduced throughput, but the proposed method has achieved better PDR and hence gives good throughput.

4. Conclusions and Feature works

The paper has presented methods to detect single faults in the MPLS network. The method is based on both protection switching and rerouting algorithms that used to reroute traffic in the MPLS network. The main motivation behind the work given in this paper is to obtain the reliable and efficient QoS routing methods for data in the MPLS network when failures occur in the network. The proposed methods avoid packet disorder, reduce packets loss, improve PDR and achieves good throughput, in addition the proposed method has less space complexity compared to other methods. An extension of the proposed method given in this paper is to work with failures occur at the same time in both node and link.

References

1. Er. Abinaiya N, M.J.J., A Survey On Multi Protocol Label Switching. *ijteee*, 2015(02): 4.
2. Shruti Thukral, B.C., A Survey on QoS Behavior in MPLS Networks. *International Journal of Advanced Research in Computer and Communication Engineering*, 2015; 4(3): p. 5.
3. Chandana B, P.P., An Efficient QOS Routing Algorithm for Protection of Data Flow in MPLS Network. *International Journal of Innovative Research in Computer and Communication Engineering*, 2014: 7.
4. Hundessa, L. and J.D. Pascual. Fast rerouting mechanism for a protected label switched path. in *Proceedings Tenth International Conference on Computer Communications and Networks (Cat. No.01EX495)*. 2001.
5. Makam, S., *et al.*, Protection/restoration of MPLS networks. Work in Progress, < draft-makam-mpls-protection-00.txt, 1999.
6. Haskin, D., A method for setting an alternative label switched paths to handle fast reroute. Internet Draft, draft-haskin-mpls-fast-reroute-05.txt, 2000.
7. Asaad, A.R.A., *Fundamentals of Wide Area Computer Network Engineering*. 2017; 98.
8. Gheini, L.D., *MPLS Fundamentals: A Comprehensive Introduction to MPLS Theory and Practice*. 2007, Cisco Press, Indianapolis.
9. Huawei Technologies Co., L., *Enterprise Data Communication Products Feature Description - MPLS*, in Huawei Technologies. 2013: 139.
10. Issariyakul, T. and E. Hossain, *Introduction to network simulator NS2*. 2011: Springer Science & Business Media.
11. Hossain, T.I.E., *Introduction to Network Simulator NS2*. Springer, 2009: 438.
12. Ahn, G. and W. Chun. Design and implementation of MPLS network simulator (MNS) supporting QoS. in *Information Networking, 2001. Proceedings. 15th International Conference on*. 2001. IEEE.
13. Nandal, K. a. "MMPLS: Modified Multi-Protocol Label Switching." *Network*. *International Journal of Innovative Research in Computer and Communication Engineering*. 2015; (01), 5.
14. Jamali, A., Naja, N., & El Ouadghiri, D. " An Enhanced MPLS-TE for Transferring Multimedia packets." *International Journal of Advanced Computer Science and Applications*, (IJACSA), 2012; 3(8).
15. Singh, R. K., Chaudhari, N., & Saxena, K. "Enhanced traffic aware LSP selection method in MPLS networks. Paper presented at the 2012" *Ninth International Conference on Wireless and Optical Communications Networks (WOCN)*, 2012.